

SAFETY INSTRUCTION

- Install the equipment in such way that the mains supply plug or the connector of the equipment can be easily reached.
 Do not place the equipment where water can drip or splash onto
- Do not place sources of heat, such as ovens, furnaces, or burning candles, etc., and sources of magnetic fields, such as TVs, microwaves, etc.
- Do not block the ventilation slots of the equipment. When installing the equipment, leave some free space around it to provide adequate ventilation.
- Do not clean the equipment with spray cleaners or solvents. Unplug the power supply before clean.

▲ CAUTION **▲**

Do not disassemble the equipment freely. Mishandling, alternations or modifications not approved by the professional technician will void the warranty.

GENERAL FEATURES

The A4 Villa Video Door Phone System offers you complete control over the access of visitors to your house, in addition, it allows you to identify the person who calls provides convenient operation to active the communicate. The system is fully compatible with CCTV cameras, indoor monitors (max. 4) /entrance panels (max. 2) can be connected into.

1. Power indicating light

9. SD card slot

10. External terminal

3. Talk button (when visitors call from outdoor station, press talk button on indoor

monitor to start conversation. End conversation after press talk button again.

 ${\bf 4.\ Unlock\ button\ (call\ from\ outdoor\ station\ /\ monitoring\ from\ indoor\ monitor\ /\ during}$

Or end conversation automatically after 120s.)


5. Monitor (to monitor outdoor station or cameras)

6. Call transfer (call transfer to other indoor monitor)

conversation, press unlock button to release the door lock.)

7. Ring volume button (Increase/decrease the ringtone volume)


8. Talk volume button (Increase/decrease the talking volume)

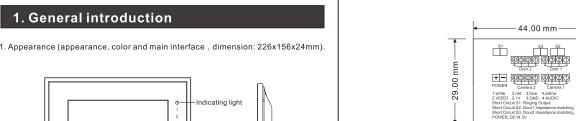

2. Functions

- 1. Monitor: can change to monitor door1,door2 or camera1,camera2
- Motion detection: To activate motion detection function under monitoring mode under door1 / 2 and camera1 / 2
- 3. Call transfer: Call transfer to other indoor monitor4. Audio message function: Leave audio message from indoor monitor, up to 18s
- 5. Time setting: enter into time setting interface to set date or time, press return button to save and exit.
- System setting: select language / ringtones / picture position / message position; format SD card; touch correction.
- Video adjustment setting: enter video adjustment setting interface to adjust contrast brightness and chroma.
- Visit records: enter into records interface, to check / delete pictures, videos, messages or copy pictures and messages.

3. Technical parameters	
Item No.:	A4-R0705TP-V
Dimension:	226x156x24mm
Working current:	≤ 410mA/DC14.3V
Standby current:	≦170mA/DC14.3V
Voltage:	DC14.3V
Temperature:	-10° C~+50° C
External storage:	SD card,4G - 32G
Operation method:	Touch screen
Resolution:	7" digital screen, 800*480 RGB

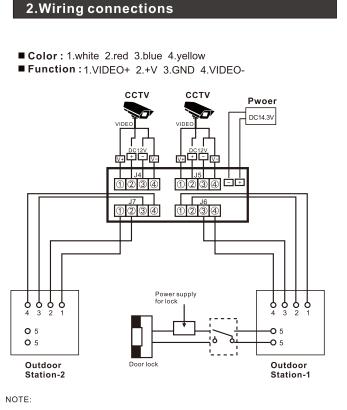

1. For lock please connect an additional power supply.

When there are 2 or more indoor monitors, short-circuit S2 and S3 of one indoor monitor, which is the farest distance to the outdoor station.

