


Instruction Manual



VP-701S
 VP-701V

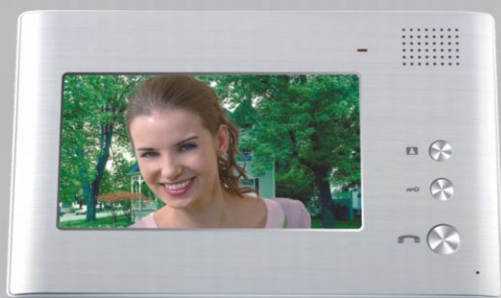

VP-703S
 VP-703V


COLOUR VIDEO DOOR PHONE KITS



I. Features (Outdoor camera purchased separately)


1. Slim fit aluminum alloy panel of indoor monitor with simplicity and classic design style.
2. Water-proof luxury outdoor camera.
3. 7" color TFT screen with low power consumption, no radiation and high definition.
4. Hands free communication.
5. Outdoor camera or indoor monitor with electric-controlled door release function.
6. Monitoring the outside of house.
7. Fourteen polyphonic melodies.
8. Chroma and brightness adjustable.
9. Enclosed 15M cable and one adapter for DIY market.

2. Indoor Monitor Installation

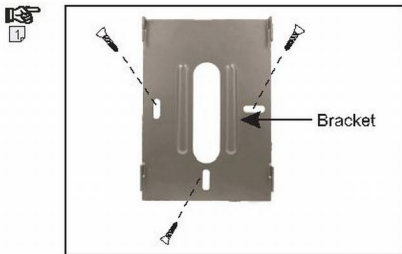


1. Fix the bracket of the video indoor monitor on the wall with screws (Photo 1).
2. Hang the monitor on the bracket after finishing the wire connection. If using AC power. Plug the enclosed AC power adapter into the side socket on the monitor (Photo 2).

3. Indoor Monitor Performance Data

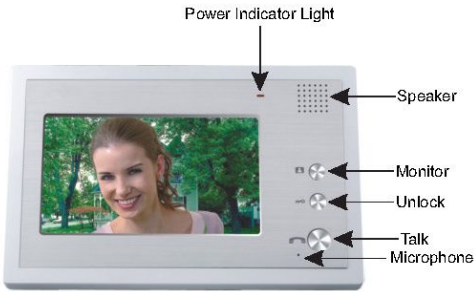


VP-70I Kit Indoor Monitor

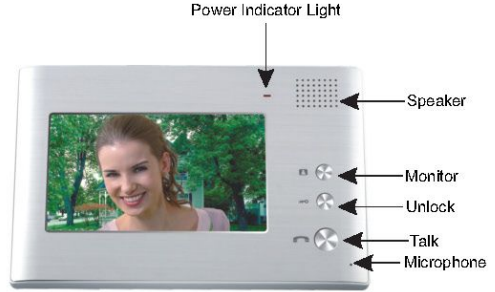

VP-70B Kit Indoor Monitor

1. Adapter input voltage: AC110-120V/60Hz or AC220V-240V/50Hz
2. Adapter output voltage, output current: AC13.5V 1200mA
3. Talking last time: 120S ± 10%
4. Monitoring last time: 40S ± 10%
5. Working distance: 50M(4 x 0.5mm²)
6. Power consumption: standby < 0.5W, working < 10W
7. Illumination intensity: 2 lucas
8. Visual angle: 92° wide-angle
9. Working temperature: -10°C~40°C
10. Relative humidity: 10-90%(RH)

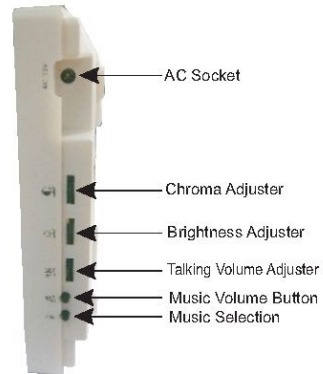

Parameter	Specifications	Unit
Screen Size	7.0	Inch
Resolution	480 X 3 X 234	Dot
Active Area	154.1 【H】 X 86.58 【V】	mm
Pixel Size	0.107 【W】 X 0.37 【H】	mm
Screen Figure Dimension	169.4 【W】 X 100 【H】 X 5.7 【D】	mm

4. Operation Instruction

1. Pressing CALL button of outdoor camera and graceful rings will be heard from indoor monitor and images of visitors will be seen. Then you can talk. The talking time can last about 120 seconds.
2. Host can use the UNLOCK button to open the door.
3. Pressing MONITOR button can monitor the outside. The monitoring time can last about 40 seconds.
4. Pressing TALK button after pressing MONITOR button can monitor the outdoor situation and talk with the visitors. Pressing the TALK button after talking is over.
5. The brightness, and chroma can be adjusted by using the button to reach the best result.
6. Talking volume adjustable by using button.
7. Optional 14 polyphonic melodies by using the button on the side of the monitor.
8. Ring volume adjustable by switch.
9. In order to reach the best images result, please take off the protective coating of the screen.



5. Accessories

- One indoor monitor
- One adapter
- One bracket for indoor monitor
- Screws

6. Notices

1. Do not install the indoor monitor at high temperature, high humidity place or near TV.
2. Do not touch the monitor screen with wet hands.
3. Please use only soft cloth to clean the monitor screen or camera in order to get a clear image.
4. Please avoid throwing or hitting the units.
5. Image could be severely affected if the camera is exposed to strong sunlight.